
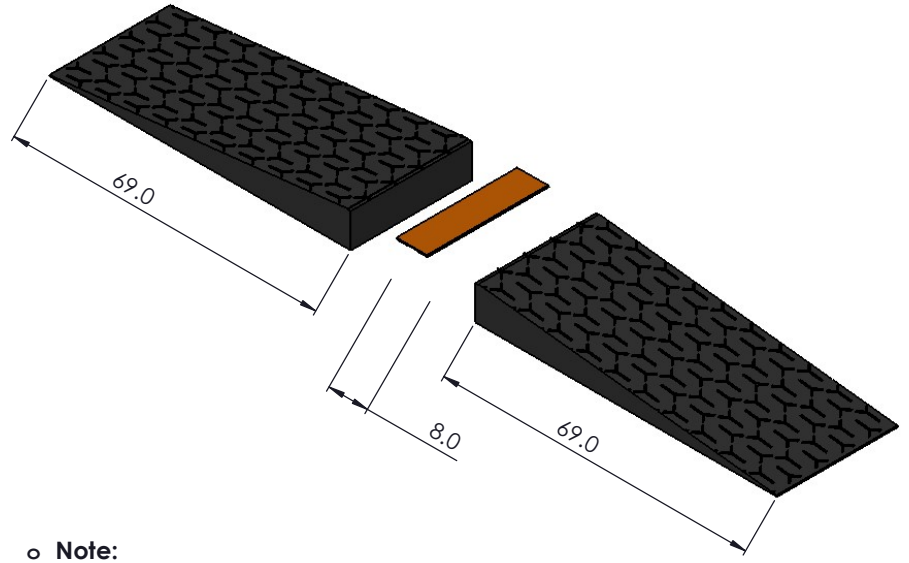
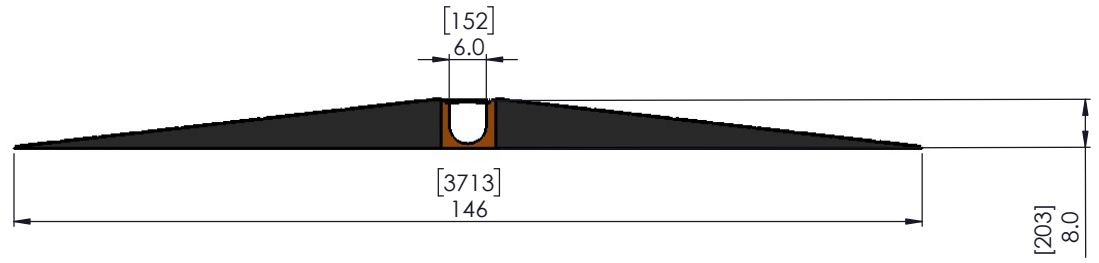


ZONE	REV	DESCRIPTION	DATE	APPROVAL
	1	PRELIMINARY RELEASE	6/12/2018	CN

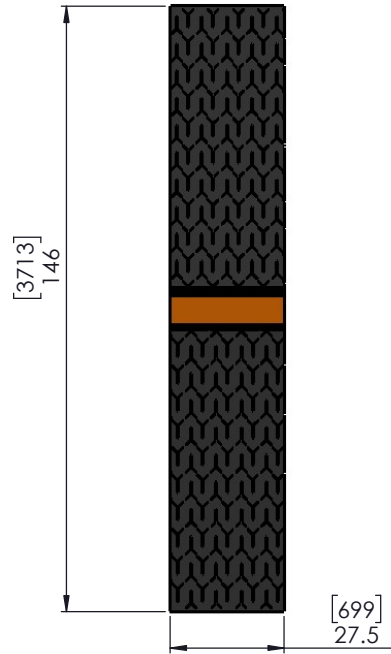

Technical Data Sheet - XG1600		
Description	Imperial	Metric
Product - Length x Width x Height	146 x 27.5 x 8	3708 x 699 x 203
Channel Size	6 x 6	152 x 152
Product Weight (lbs)	570	258
Load Capacity	600 Tons	544K
Operating Temperature	-20°F up to +140°F	-30°C up to +60°C
Measurements are approximate	Imperial = inches & lbs.	Metric = mm & kg.

Standard Colors - Black Base/Orange Lid  
 Material - Polyurethane  
 Durometer - 90 Shore A Base +/- 5 --- 55D Shore D Lid +/-5  
 Manufacture in USA

- Note:
  - Left Ramp, Right Ramp, and Channel connected together using Reinforced Fiberglass Rods
  - Ability to add Additional Channels as needed

<b>PROPRIETARY AND CONFIDENTIAL</b> THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE ESAC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF THE ELASCO IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/32 ANGULAR: MACH ± 1° BEND ± 1° X = ± .1 XX = ± .01 XXX = ± .005	<b>Elasco Products, LLC</b> 18065 Redondo Circle Huntington Beach, CA 92648	
	UNLESS OTHERWISE SPECIFIED DIMENSIONS AND TOLERANCES PER ASME Y14.5M	DRAWN: CN 6/12/2017 CHECKED: APPROVED: ELECTRONIC SIGNATURE ON FILE	TITLE: <b>XTREME GUARD 6" Channel</b> SIZE: <b>B</b> DWG. NO. <b>XG1600</b> REV <b>1</b>